



LAUNDRY



PROFESSIONAL WASHER EXTRACTORS



01. MORE FEATURES

- New TP2 scheduler with touch screen. It allows to create an indefinite number of programs (26 preestablished).
- Allows programming, importing or exporting programs and software updates via USB.
- Standard traceability: The entire washing process (temperatures, water levels) is stored in the washing machine and can be extracted to a PC via USB memory.
- WET CLEANING included in the scheduler (modifiable water levels and washing speed).
- Wash-Control, PC software for program management, traceability and other data.
- Designed for remote connections.
- Designed for multipayment system.
- 8 programmable automatic liquid dosing signals with timedelay element. With a choice of 6 extra signals.
- Reduced washing cycles (heating power 6 kW).

02. MORE ROBUSTNESS

- Gray skinplate.
- Tank, drum and blades made of AISI 304.
- Robust door made of aluminum.
- Industrial door lock machine door seal (no inner drum seal).
- Industrial housing and bearings.
- Frequency converter and industrial motor.

03. MORE VERSATILITY

- New possibility to customize the machines from factory with the available options.
- OPL ↔ COIN
Convertible models from self-service to OPL and vice versa.
- ONE UNIT ↔ COLUMN
Standard model easily installable in column.
- ELECTRIC ↔ HOT WATER
Standard electric model easily convertible to hot water model and vice versa.
- DRAIN VALVE ↔ DRAIN PUMP
Standard models easily convertible. Easy access for maintenance.

04. MORE EFFICIENCY

- Intelligent and manual weighing system. Automatic adjustment of water and chemicals.
- Possibility of configuring three levels of savings.
- High Factor G 450. Reduced residual humidity → Reduces drying time.
- Designed for use with tanks for water recovery.

CHARACTERISTICS


- High spinning washers, not requiring anchoring to the ground.
- Tank with 4 detergent compartments.
- 2 standard water inlets.
- Equipped with a frequency converter (standard 50-60 Hz). Balancing system controlled by the same converter.
- Model with drain valve (V) and model with drain pump (P).
- Model with valve specially designed to wash mops.
- Includes levelers.
- CE and WRAS product certifications.

OPTIONS

- Double drain (only valve mode).
- Drain pump kit.
- Drain normally closed "NC". In case of power failure, the water stays inside the tank.
- 6 extra signals for dosing: a total of up to 14 available.
- Silicone door seal.
- Door with opposite opening.
- Delayed door opening, in case of power failure.
- Stainless steel fitment AISI 304.
- Designed for remote connections. (Wifi, Ethernet ...)
- Plinth that facilitates access to the machine.
- Special mop plinth (with filter) - valve models only.
- Plinth and water recovery tank.
- Kits for self-service: Central payment, file, wallet.
- Voltage 110 1N 50/60 Hz.
- Voltage 440 3- (No N) 50/60 Hz.

TECHNICAL DATA

	UNID.	LAP-0820 TP2 V	LAP-0820 TP2 P	LAP-1025 TP2 V	LAP-1025 TP2 P
DRUM					
Load capacity (KG) 1:9 / 1:10	lb	20/18	20/18	24/22	21/22
Volume	CU.FT	3	3	4	4
Diameter	in	20.95	20.95	20.95	20.95
Depth	in	14.17	18.17	16.73	16.73
GENERAL DETAILS					
Washing speed / Spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250
G Factor	-	450	450	450	450
Self service version	-	SI	SI	SI	SI
Double drain	-	Si	No	Si	No
Weighing system / tilting system	-	No	No	No	No
DOOR					
Height center door / Height base door	in	21.15/11	21.15/11	21.15/11	21.15/11
Diameter	in	14.69	14.69	14.69	14.69
DYNAMIC FORCE					
Static Load	KN	1,4	1,4	1,5	1,5
Maximum Dynamic load	KN	0,5	0,5	0,6	0,6
Vertical maximum load	KN	0,64	0,64	0,75	0,75
Max revolutions	r.p.m.	1.250	1.250	1.250	1.250
Frequency of dynamic load	-	18,33	18,33	18,33	18,33
POWER					
Motor	HP	1	1	1	1
Electric heating	HP	8	8	8	8
Hot water heating	HP	0	0	0	0
Max. power electric model	HP	8.4	8.4	8.4	8.4
Max. power HW model	HP	1	1	1	1
Max. power steam	HP	No	No	No	No
CONNECTIONS					
Water inlet	in	3/4"	3/4"	3/4"	3/4"
Drain	mm/in	2"	1" (Bomba)	2"	1" (Bomba)
DIMENSIONS / PACKING DIMENSIONS					
Width / width	in	26.77/28	26.77/28	26.77/28	26.77/28
Depth / Depth	in	27.4/33	27.4/33	30.39/33	30.39/33
Height / height	in	41/44.5	41/44.5	41/44.5	41/44.5
Net weight / Gross weight	lb	309/331	309/331	309/331	311/352

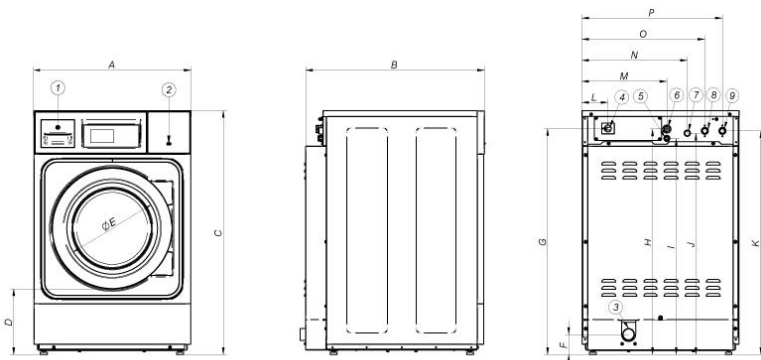

- 01. Soap dispenser
- 02. USB port
- 03. Drain
- 04. Main switch
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Liquid soap inlet
- 08. Cold water inlet
- 09. Hot water inlet
- 10. Plinth height 389 mm

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-0820 TP2 V	26,77	27,48	40,94	10,94	14,69	3,39	37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	7,83
LAP-0820 TP2 P	26,77	27,48	40,94	10,94	14,69		37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	
LAP-1025 TP2 V	26,77	30,39	40,94	10,94	14,69	3,39	37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	7,83
LAP-1025 TP2 P	26,77	30,39	40,94	10,94	14,69		37,95	37,87	36,30	37,17	37,56	4,33	14,41	17,83	20,79	23,74	