

TUMBLE  
DRYERSGREEN  
EVOLUTION**FAGOR**  
FAGOR INDUSTRIAL

# Tumble Dryers

FD - 65 TP2

FD - 80 TP2

**ADVANCE**HIGH PERFORMANCE, EFFICIENT  
TECNOLOGY, ADVANCE DRYING**TOUCH  
PLUS  
CONTROL****STAINLESS  
STEEL DRUM****MIXED  
FLOW****SOFT  
TOUCH****AUTOREVERSE  
DRUM****873FGD7E**

- User friendly and totally programmable microprocessor with a 7" **Touch II screen**
- USB Connection to upload programming or download traceability, data analysis. You can program time of the day promotions and discounts automatically.
- Videos shown on display: ads, instructions (useful for coin laundry)

- Anti-wrinkle system.
- End of cycle tone.
- Emergency stop button and security micro magnet to stop operation.
- Drum motion by pulley and belts with the drum supported by wheels.
- Automatic reverse rotation of the drum.
- Frequency inverter for smoother operation.

ŽAB> ↔ HWVW 8SYadVdWtUS` TW8&fk  
Ua` hWVW Xa\_ AB>fa EWZEVhUWS` V hUW  
hVtSZ

- Easy-to-clean, outer casing in gray skin-plate with stainless steel look.
- Ergonomic big loading door with a 180° opening and the option of double glazing.
- Axial-radial airflow, resulting in greater drying efficiency.
- Drum with special smooth perforations for the gentle treatment of fabrics.
- Stainless steel lint filter at the bottom for more ergonomic, larger, and improved airflow.

**OPTIONS:**


- iDry System (Intelligent moisture sensor)
- FK System (Integrated fire prevention system).
- Double door-glass.
- Stainless steel side panels.
- Stainless steel front panel.

**ONNERA GROUP**[www.fagorcommercial.com](http://www.fagorcommercial.com)

**ONNERA USA, Inc.**  
13105 NW 47th Ave  
Opa-locka, Florida 33054  
USA

TECHNICAL DATA		UNIT.	FD- 65	FD- 80	
CAPACITY					
Capacity 1/18	lb		70	80	
Capacity 1/20	lb		60	75	
Hourly Output *	lb/h		130.7	140.8	
Evaporation capacity *	l/h		30.9	32.1	
DRUM					
Ø Drum	in		37.25	37.25	
Ø Door	in		31.50	31.50	
Door center height	in		41	41	
Door bottom height	in		64.50	64.50	
Drum depth	in		30.75	36.85	
Drum volume	cu ft		19.4	23.3	
POWER					
Drum motor power	hp		0.75	0.75	
Fan motor power	hp		0.75	0.75	
Electric heating power (elec.model)	kW		Not Available	Not Available	
Total electric power (elec.model)	kW		Not Available	Not Available	
Gas heating power	btu/h		140,000	140,000	
Total electric power (gas model)	kW		1.15	1.15	
Steam heating power	kW		50.1	50.1	
Steam heating power (gas model)	kW		1.15	1.15	
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS
120 V / 60 Hz / 1	FLA	-	30 A	-	30 A
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	Not Available	-
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	Not Available	-
Gas connection	BSP	-	1/2"	-	1/2"
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	in		38.75 / 42	38.75 / 42	
Net Depth / Gross Depth	in		41.50 / 45.50	47.60 / 51.60	
Net Height / Gross Height	in		76.60 / 82	76.60 / 82	
Height without heating battery	in		-	-	
Net weight / Gross weight	lb		507 / 573	573 / 628	
OTHERS					
Max airflow	CFM		706	706	
Ø Duct Size	in		8	8	
Sound level	dB		65	65	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

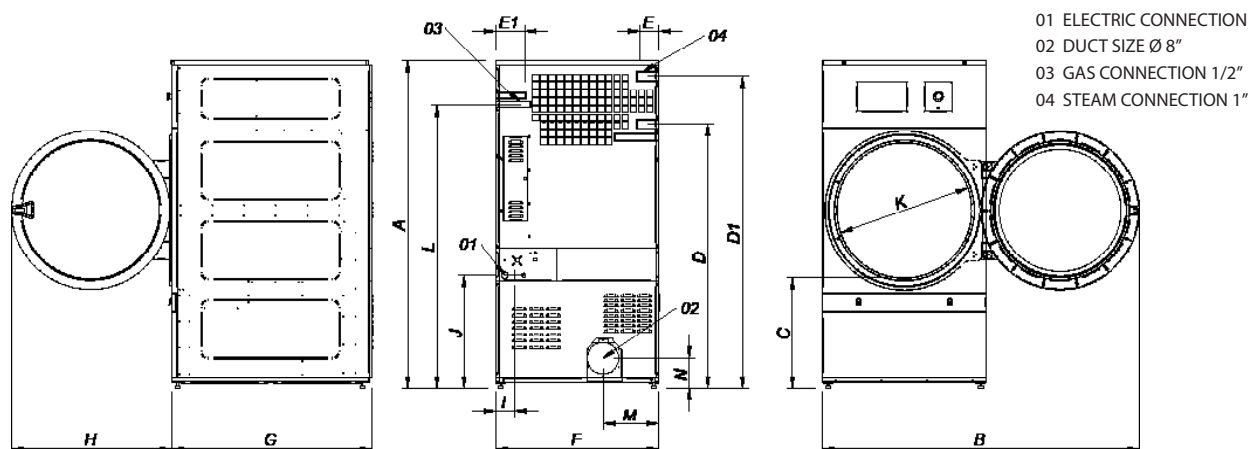

DIMENSIONS (in)	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N
FD-65	76.60	75	25	62.60	74	4.50	6.85	38.75	41.50	37.75	4.30	26.75	31.60	67.25	13.35	7
FD-80	76.60	75	25	62.60	74	4.50	6.85	38.75	47.60	37.75	4.30	26.75	31.60	67.25	13.35	7

