



FWR-60 TP2

FAST SPIN

HARD MOUNT WASHER

G FORCE = 300 | 60 lbs

MAXIMUM PERFORMANCE

TOUCH
PLUS
CONTROLEFFICIENT
MIXBALANCE
CONTROLMULTI-
CHOICE
INLETWET
CLEANINGMAINT.
KAREOPTIMIZED
DRUMOPTIMAL
CONSUMP.

FEATURES

- **G Force = 300.**
- Hard-mounted machines. Require anchoring to the floor.
- Drum and jacket in AISI-304 stainless steel.
- Easy-to-clean exterior panels, manufactured in skinplate with stainless steel appearance.
- Detergent tray with 4 compartments.
- 8 programmable signals for automatic liquid dosing.
- Variable-frequency drive (standard 50-60 Hz).
- Balancing systems
- New **TOUCH PLUS CONTROL** (TP2) with a 7" color touch screen, and 37 available languages. TP2 lets you create an infinite number of programs (29 pre-set), as well as play videos.
- TP2 allows programming, importing and exporting of programs and software updates via USB.
- Traceability as standard: temperatures, water levels, etc. are stored on the washer and is extractable to a PC by USB memory.
- All washers are **WET CLEANING** ready. The TP2 control allows you to create any wet cleaning program (adjustable water levels and wash speed).
- **EFFICIENT MIX.** These machines are equipped with an automatic water mixer (mixing different water temperatures) which provides energy savings and reduces washing times.
- **BALANCE CONTROL:** detects the imbalance at an early stage. This way the operation is much smoother, extending components lifetime, and saving time and energy.
- **MULTICHOICE INLET:** 3 standard water inlets. All washers are equipped with a third water inlet to speed filling time, for decalcified water, ozone, or recycled water.
- **MAINTENANCE KARE:** A simple design, focused in optimum accessibility; with easy-to-access mechanical and electronic parts. key to easy maintenance.
- The TP2 control provides a complete technical menu, self-diagnosis systems, alarms, restricted access areas, etc.
- **OPTIMIZED DRUM:** The special perforations in the paddles of the drum create a water cascade effect that considerably increases the mechanical action and reduces the amount of water in each wash. The effective design of the drum and tank with minimal spaces between them, reduces the energy consumption to heat the water and the excessive use of chemical products.
- **OPTIMAL CONSUMPTION.** All washers are equipped with an efficient system that sense the load weight and automatically adapts the quantity of water and chemicals needed.
- Washers compatible with water recovery tanks.
- With the TP2 control you can convert your **OPL** washer to **Coin/Vended** mode. Just add a coin mechanism kit or other payment system.RS-485 communication.

OPTIONS:

- Anchoring base.
- Exterior panels in AISI-304 stainless steel.
- Front panels in AISI-304 stainless steel.
- Double drain kit to recover water.
- NC Option: drain normally closed.
- Reversible door opening.
- 6 extra signals for dosing
- Timed opening system.
- Printer.
- Shower system: water recirculation for very delicate linen (wet cleaning complement).
- Marine electric versions.
- Protective covering for the electronics system.

www.fagorcommercial.com

ONNERA GROUP

ONNERA USA, Inc
13105 NW 47th Ave
Opa-locka, Florida
33054 USA

us.marketing@onneragroup.com



TECHNICAL DATA

UNIT.

FWR - 60 TP2

DRUM

Load capacity 1/9 - 1/10

lbs

62/55

Volume

cu ft

9

Diameter

in

30.3

Depth

in

20.8

GENERAL DATA

Wash speed / Spin speed

rpm

48/836

G Force

-

300

Maximum force transmitted

kN

3.96 ±10

Dynamic force frequency

Hz

11.5

Noise level

dB

< 70

Self-service version

-

Yes

Double drain

-

Opt.

Weighing system

-

No

SLUICE option

-

No

DOOR

Height door centre / Height door base

in

27.55 / 15.75

Diameter

in

18.11

POWER

Motor

Hp

4

Heating (electric heating model)

kW

18

Maximum power (electric heating model)

kW

19

Maximum power (steam and hot water model)

kW

3

CONNECTIONS

ELECTRIC

STEAM / HOT WATER

208-240V / 50-60 Hz / 1

FLA (Amp)

-

16 A

208-240V / 50-60 Hz / 3

FLA (Amp)

63 A

-

440V / 50-60 Hz / 3

FLA (Amp)

32 A

-

Steam inlet (Steam mod.)

in

3/4"

Maximum steam consumption (Steam, mod.)

lbs/h

33

Water inlet

inch

3/4"

Grid pressure

kg/cm²

2-4

Maximum water consumption *

Gal/h

46.52

Drain

in

3"

Drainage capacity

gal/min

52.8

DIMENSIONS / DIMENSIONS WITH PACKAGING

Width / Width

in

34.8 / 36.61

Depth / Depth

in

39.80 / 45.27

Height / Height

in

52.76 / 59.90

Net weight / Gross weight

lbs


749 / 815

Gross volume (with packaging)

cu ft

56.5

* Program n° 20, 75 % load.

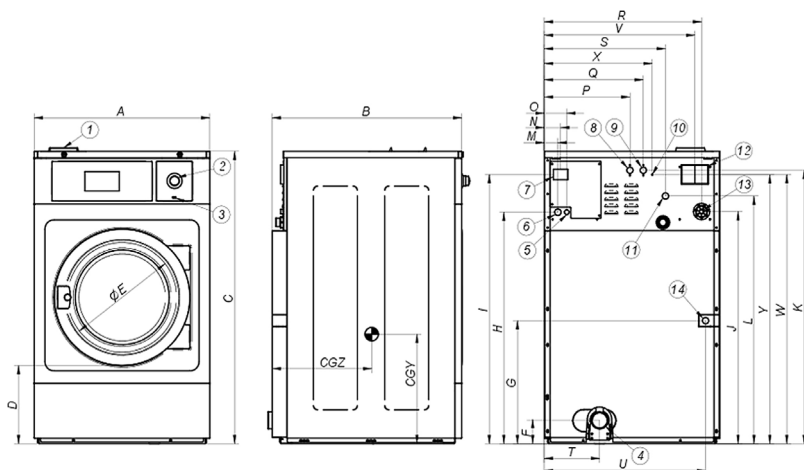

- ① Soap dispenser.
- ② Emergency stop.
- ③ USB port.
- ④ Drain.
- ⑤ Electrical connection to liquid soap pumps.
- ⑥ Electrical connection.
- ⑦ Main switch.
- ⑧ Auxiliary water inlet.
- ⑨ Hot water inlet.
- ⑩ Ground connection.
- ⑪ Cold water inlet.
- ⑫ Water overflow.
- ⑬ Connection for liquid soap.
- ⑭ Steam connection.

DIMENSIONS (in)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWR-60 TP2	34.80	37.99	52.76	15.75	18.11	5.71	21.57	41.85	48.43	41.93	49.21	44.69	2.40	2.91	3.98	16.85	20.00	31.54	25.16	10.55	32.28	30.35	48.03	23.62	50.39	23.27	21.38

